


SPINDELLEISTUNGS- DIAGRAMME.


[SPINDLE POWER DIAGRAMS.]

Hauptspindeln [Main spindles]		ACURA / FORTE			TILTENTA / FORTE			
		50	65	85	7	9	10	11
SK40/BT40	CELOX 14.000 min ⁻¹ , 117 Nm, 22 kW	●	●	●	●	●	-	●
SK40/BT40	CELOX 14.000 min ⁻¹ , 183 Nm, 29 kW	●	●	-	●	-	-	-
SK40/BT40	CELOX 14.000 min ⁻¹ , 185 Nm, 37 kW	-	-	●	-	●	-	●
SK40/BT40/HSK A63	CELOX 18.000 min ⁻¹ , 136 Nm, 35 kW	●	●	●	●	●	-	●
HSK A63	CELOX 15.000 min ⁻¹ , 217 Nm, 50 kW	-	●	●	-	●	-	●
SK50/BT50/HSK A100	CELOX 8.000 min ⁻¹ , 300 Nm, 50 kW	-	-	-	-	-	●	-
SK50/BT50/HSK A100	CELOX 12.000 min ⁻¹ , 300 Nm, 50 kW	-	-	-	-	-	●	-


SK40/BT40, CELOX 14000 1/min, 117 Nm, 22,00 kW

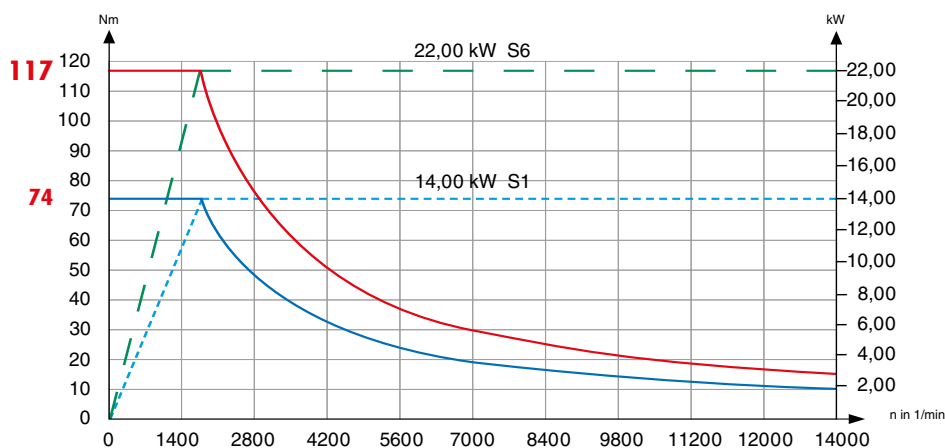


SK40/BT40, CELOX 14000 1/min, 183 Nm, 29,00 kW

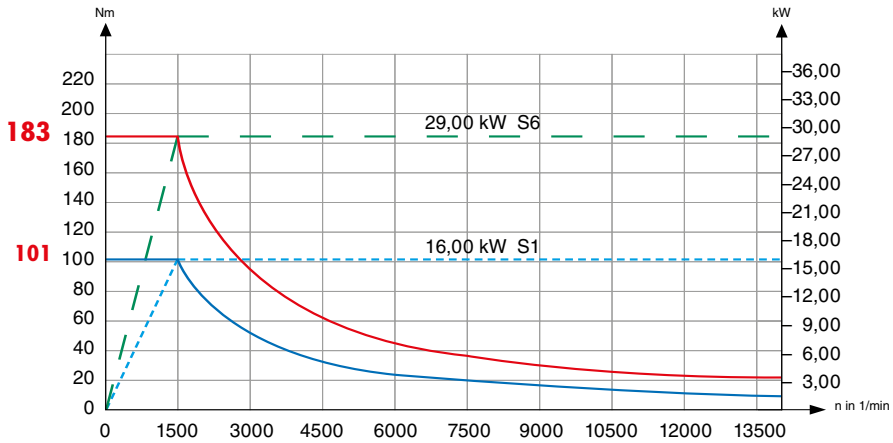


SK40/BT40, CELOX 14000 1/min, 185 Nm, 37,00 kW

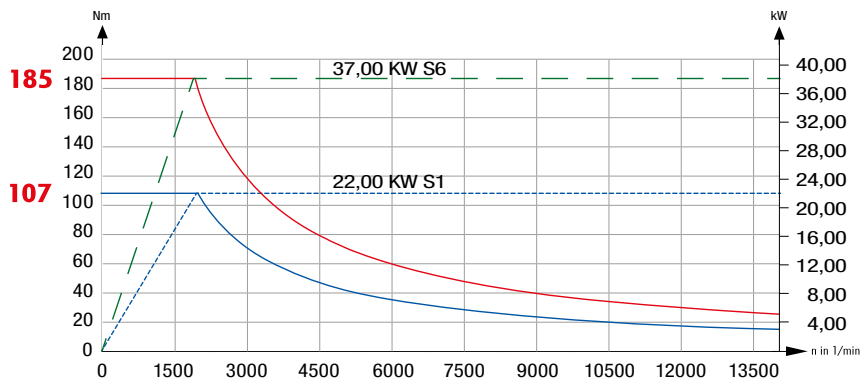


SK40/BT40/HSK A63, CELOX 18000 1/min, 136 Nm, 35,00 kW

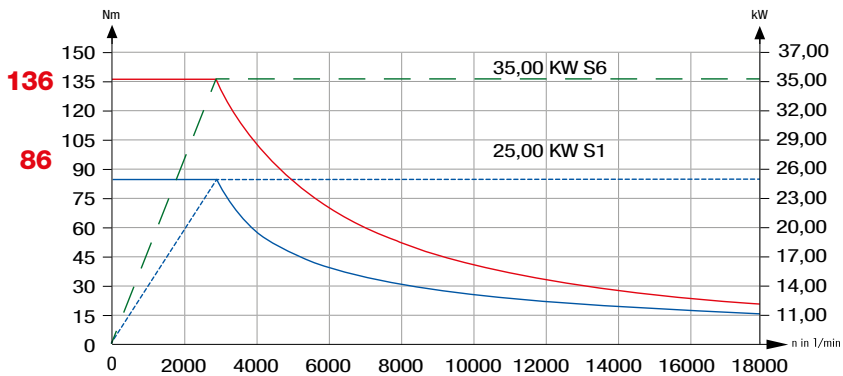

HSK A63, CELOX 15000 1/min, 217 Nm, 50,00 kW

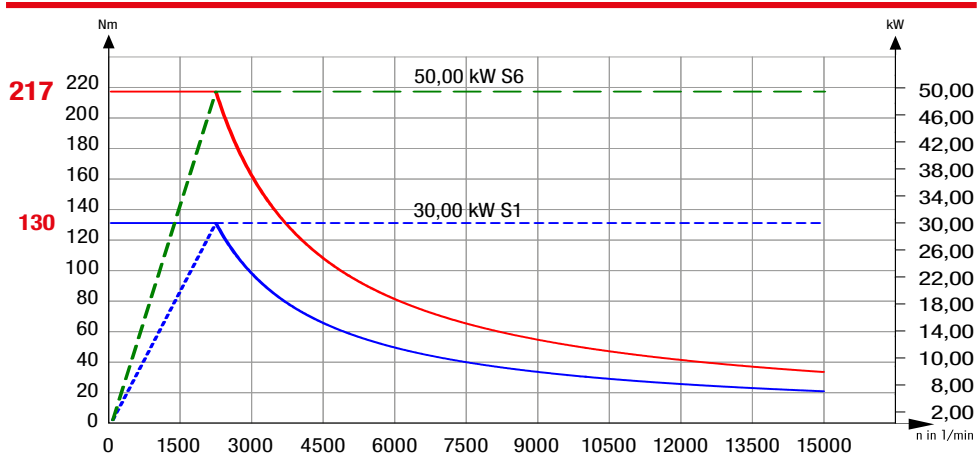

SK50/BT50/HSK A100, CELOX 8000 1/min, 300 Nm, 50,00 kW

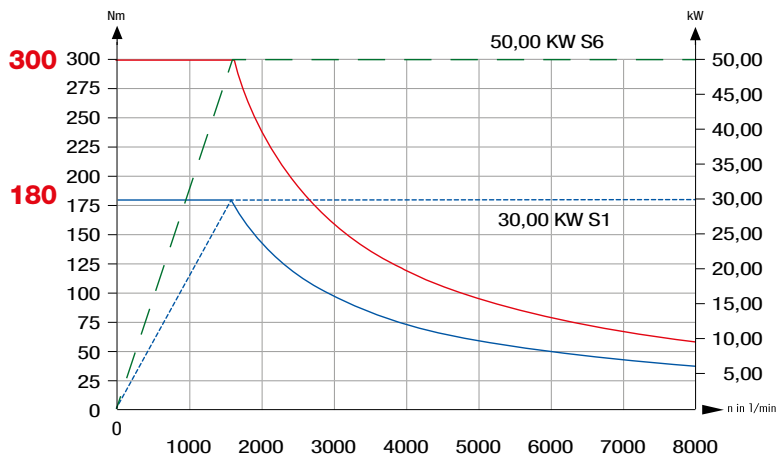

SK50/BT50/HSK A100, CELOX 12000 1/min, 300 Nm, 50,00 kW

